



Accepted as Shown  
 Revise and Resubmit  
 Accepted as Modified  
 Date: \_\_\_\_\_  
 Per: \_\_\_\_\_

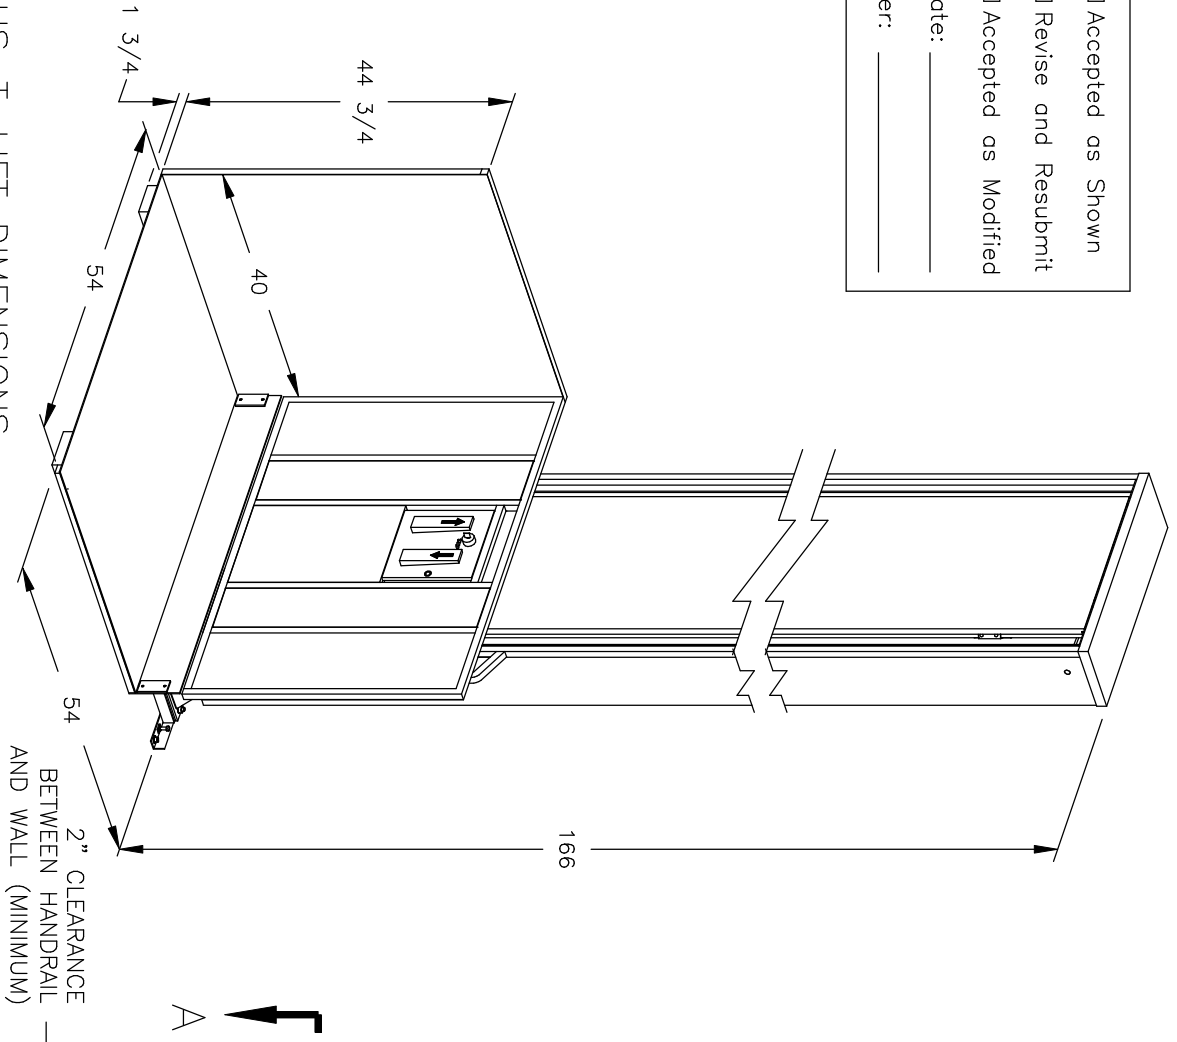

- SPECIFICATIONS:**
- 40" x 54" LIFT PLATFORM
  - 54" x 54" FOOTPRINT
  - 166" TOWER HEIGHT
  - 0" - 144" LIFT RANGE
  - MAXIMUM LOAD 550 lbs.
  - 8 FEET/MINUTE LIFT SPEED
  - SCREW NUT WORM GEAR DRIVE
  - MOTOR: 1/2 H.P., 110V A.C.
  - POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
  - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
  - SAFETY HANDRAIL ON CARRIAGE
  - ZERO-LOAD START IN BOTTOM POSITION
  - SOLID PLATFORM

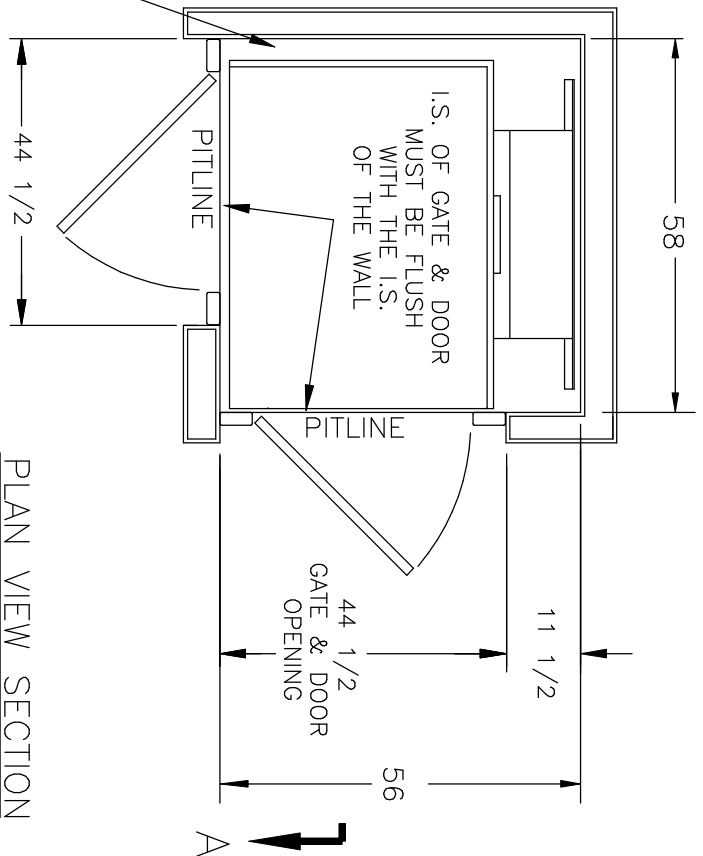

**TRUS-T-LIFT DIMENSIONS**

TOTAL TRAVEL	144	INCHES	No. OF LANDINGS	2
--------------	-----	--------	-----------------	---

ENCLOSED TRUS-T-LIFT ADJACENT ACCESS SAMPLE DRAWING


ARCHITECT

GENERAL CONTRACTOR




TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS

DWN. BY:	B.H.	CHECKED BY:	SCALE:	N.T.S.	DATE:	19/02/04	DRAWING No.	144UCREGDNAP	1/2	REV
----------	------	-------------	--------	--------	-------	----------	-------------	--------------	-----	-----

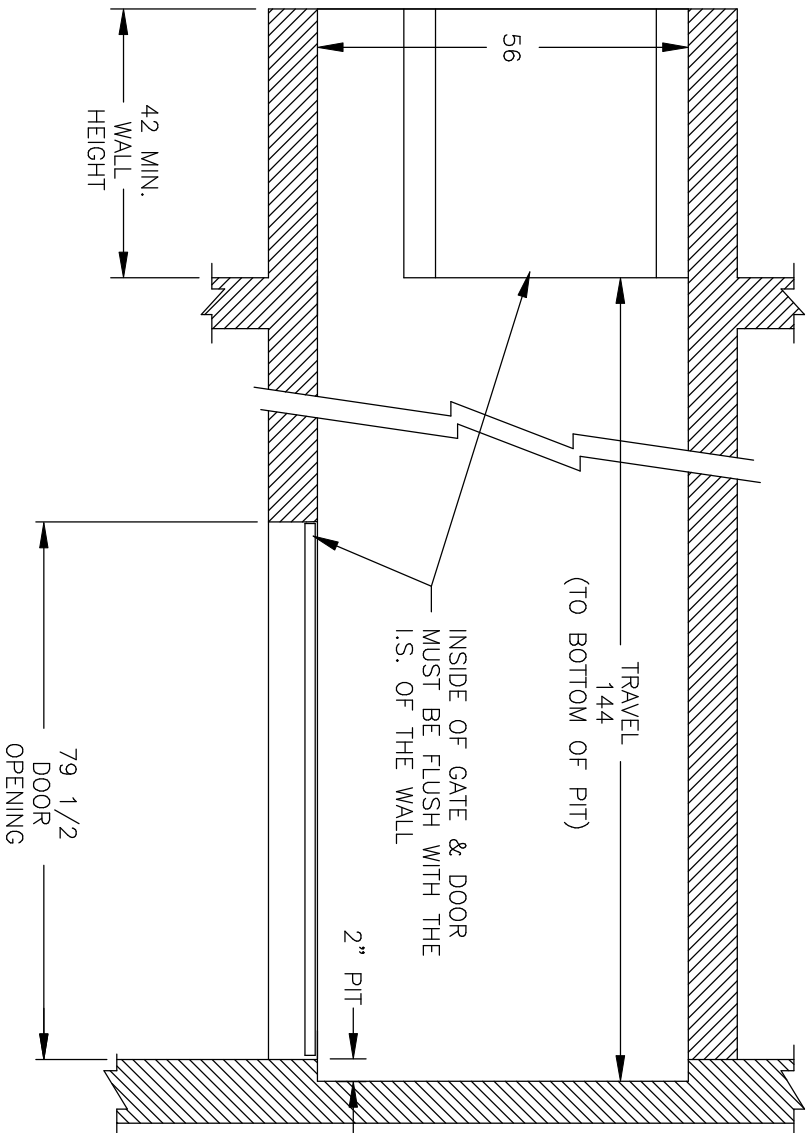

- NOTES:  
 - Dimensions are in inches  
 - Designed and built to meet ASME-A17.1 Safety Code

SECTION A-A

TOTAL TRAVEL	144	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS<T>LIFT ADJACENT ACCESS SAMPLE DRAWING			
ARCHITECT				
GENERAL CONTRACTOR				
DWN. BY:				
B.H.				
CHECKED BY:			TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS	
SCALE:		DATE:		DRAWING No.
N.T.S.		19/02/04		144UCREGDNAP 2/2
				REV