


Accepted as Shown
 Revise and Resubmit
 Accepted as Modified
 Date: _____
 Per: _____

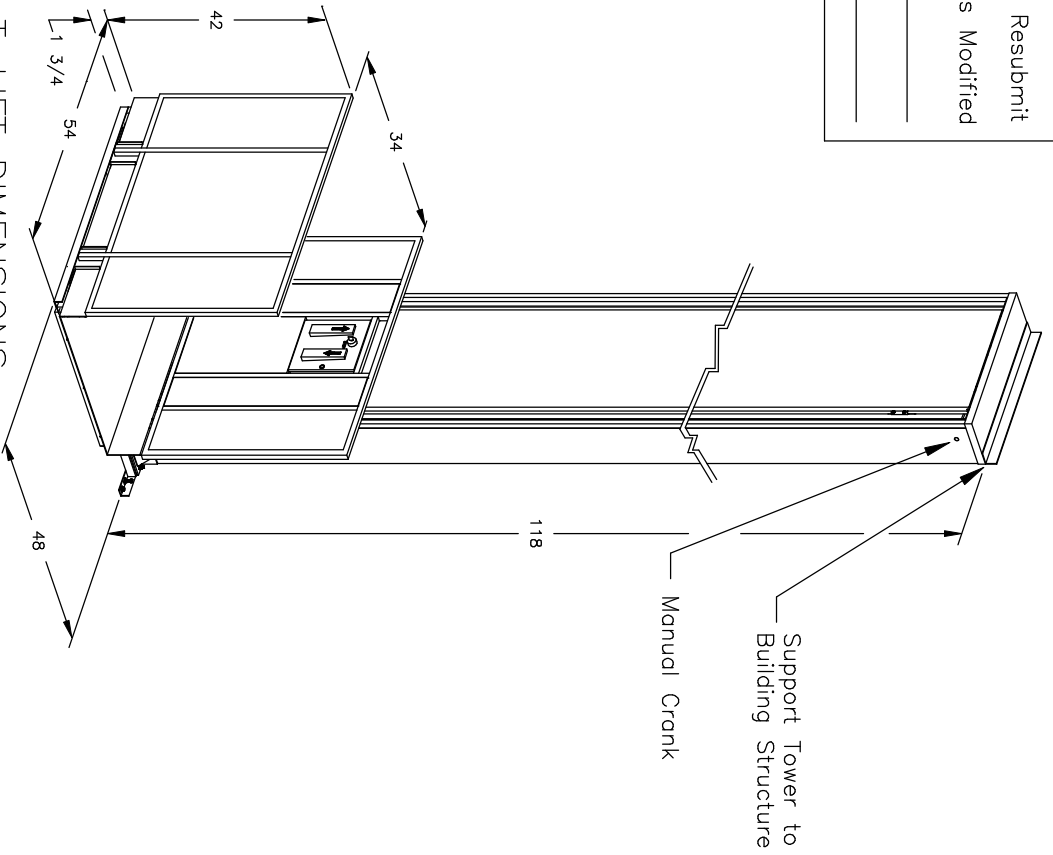

TRUS-T-LIFT DIMENSIONS


- SPECIFICATIONS:**
- 34" x 54" LIFT PLATFORM
 - 48" x 54" FOOTPRINT
 - 118" HEIGHT
 - 0" - 96" LIFT RANGE
 - MAXIMUM LOAD 550 lbs.
 - 8 FEET/MINUTE LIFT SPEED
 - SCREW NUT WORM GEAR DRIVE
 - MOTOR: 1/2 H.P. 110V A.C.
 - POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
 - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
 - SAFETY HANDRAIL ON CARRIAGE
 - ZERO-LOAD START IN BOTTOM POSITION

NOTES:


- Dimensions are in inches
- Designed and built to meet ASME-A17.1 Safety Code

TOTAL TRAVEL	96	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS-T-LIFT S A M P L E D R A W I N G			
ARCHITECT				
GENERAL CONTRACTOR	n/a n/a n/a			

		TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS	
DWN. BY:	R.A.MEUNIER	SCALE:	N.T.S.
CHECKED BY:		DATE:	26/02/02
		DRAWING No.	96UCREDCNP
			1/2

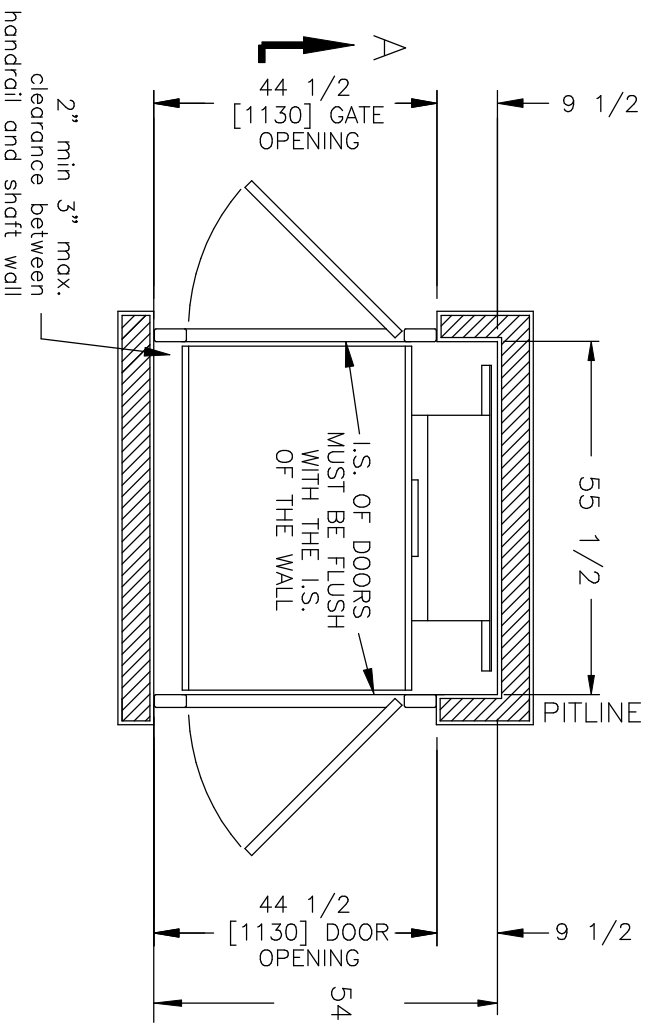

PLAN VIEW SECTION

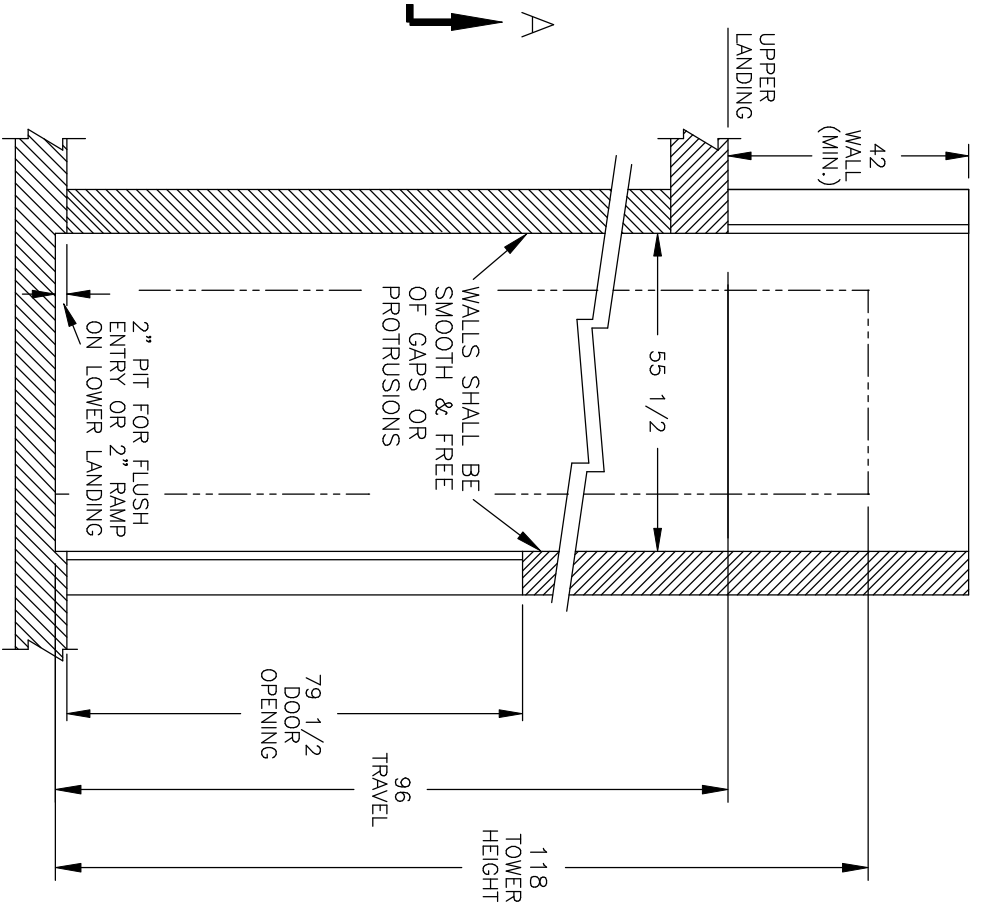

SECTION A-A

TOTAL TRAVEL	96	INCHES	No. OF LANDINGS	2
--------------	----	--------	-----------------	---

LOCATION ENCLOSED TRUS-T>LIFT
S A M P L E D R A W I N G

ARCHITECT

GENERAL CONTRACTOR n/a
n/a
n/a

TRUS-T LIFT

TRUS-T-LIFT ELEVATOR
INSTALLATION DETAILS

DWN. BY: R.A.MEUNIER	SCALE: N.T.S.	DATE: 26/02/02	DRAWING No. 96UCREDGNP
CHECKED BY:			2/2